

SPECIFICATION

Brand: **BATTISTA**

Design: **Michele De Lucchi con Sezgin Aksu**

Codes: 1640, 1641, 1642-B, 1642-AR

Code **1640**




Dimension: Ø 32 cm - H 180 cm

Description: stanchion with circular shaped silver grey epoxy-powder coated cast iron base, with a hollow centre, 320 mm in diameter fitted with floor protective pads. Silver grey epoxy-powder coated 32 mm diameter tubular steel stand, fastened to the base via M8 zinc-plated steel screws. Upper handle made from polished cast aluminium fastened to the stand by M8 zinc-plated steel screw. The upper and lower 4-way hooks used to insert the panel holder rods (code 1641) are made in chrome-plated folded steel.

Codes: **1641**

Dimension: 95 cm - H 6,5 cm

Description: the panel holder rails are inserted into the upright 4-way supports (code 1640) and can rotate freely inside, allowing them to be used at various angles. The upper rod is made from 12 mm diameter chrome-plated steel bar which is inserted into the upright supports and has two safety locks made of chrome-plated brass screwed into the ends to prevent accidental removal. The lower rod is made of a 12 mm diameter chrome-plated steel bar and is inserted in the upright supports in which it can move freely inside.

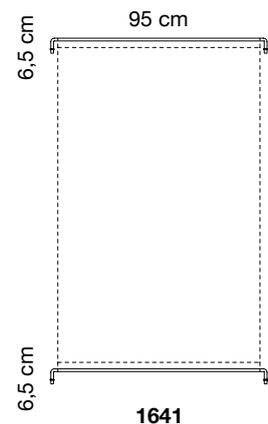

Codes: **1642-B, 1642-AR**

Dimension: 89 cm - H 167,5 cm

Description: Snowsound Fiber Textiles 1 sound-absorbing fabric, made of polyester. The fabric panel is folded and stitched along the sides; the top and bottom are sewn pocket style to insert the rods (code 1641).

Fabric: reaction to fire Italian Class 1, test executed according to UNI 8456 and UNI 9174 and Euroclass B-s2, d0 reaction to fire classification according to UNI EN 13501-1, executed following UNI EN ISO 11925-2 and UNI EN 13823

Colors available:



1642-B



1642-AR

Codes: **1642-305, 1642-307**

Dimension: 89 cm - H 167,5 cm

Description: Snowsound Fiber Textiles 3 sound-absorbing fabric, made of polyester. The fabric panel is folded and stitched along the sides; the top and bottom are sewn pocket style to insert the rods (code 1641).

Fabric: reaction to fire Italian Class 1, test executed according to UNI 8456 and UNI 9174 and Euroclass B-s1, d0 reaction to fire classification according to UNI EN 13501-1, executed following UNI EN ISO 11925-2 and UNI EN 13823


Colors available:




1642-305



1642-307

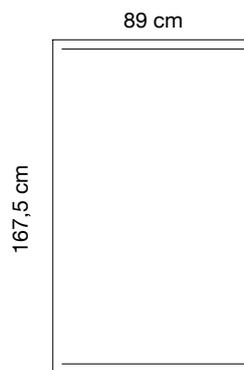

**1642-B
1642-AR**

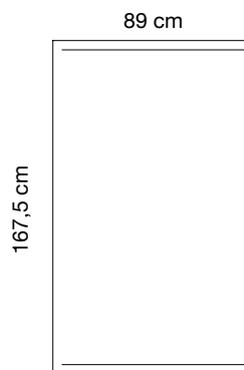

**1642-305
1642-307**

